



DYNAPAC

Part of the Atlas Copco Group

F141C Tracked pavers



Technical data

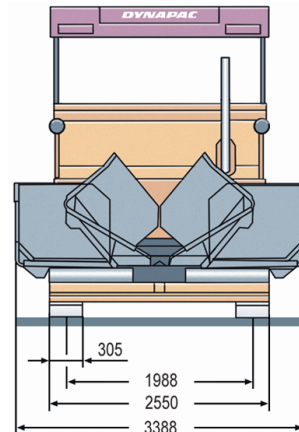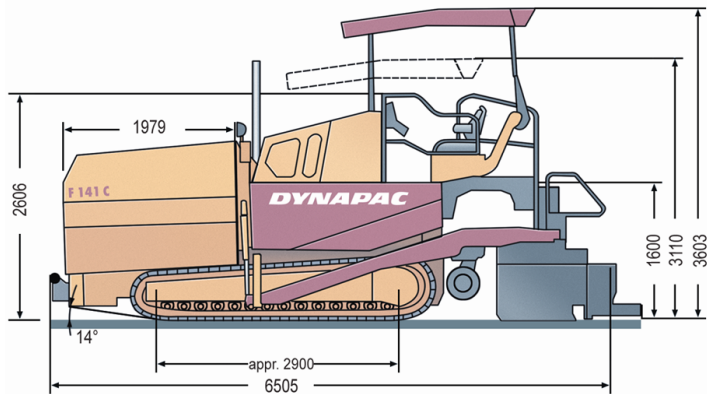

Dimensions	F141C
Basic width	2.55 m
Working width, maximum (incl. extension boxes)	9 m
Working width, minimum (with reducing shoe)	2 m
Masses	
Weight	18.50 t
Capacity	
Placement thickness (max)	300 mm
Theoretical placement capacity	750 t/h
Material hopper	
Capacity	13 t
Capacity	6 m ³
Dumping height, center	520 mm
Dumping height, outside	600 mm
Hopper width, internal	3,388 mm
Traction	
Paving speed	0– 23 m/ min
Transport speed	4.50 km/ h
Engine	
Manufacturer	Deutz
Model	TCD2013L06
Rated power, SAE J1995	140 kW (190 hp) @ 1,800 rpm
Electrical system	24V
Emissions according to	EU 3A / Tier 3
Undercarriage	
Crawler length	2,900 mm
Crawler width	305 mm
Final drive	Hydrostatical - direct drives comprising planetary gear units and hydraulic oil motors, integrated in crawler track frame
Auger	
Auger diameter	380 mm
Auger control	Proportional speed control. Left and right augers to be controlled separately. Reversible direction of rotation.

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.